

Vertex100

Liquid Particle Counter

Vertex100 sets a new industry benchmark as the most compact liquid particle counter available, boasting an exceptional sensitivity level of 100 nanometers.

Engineered with cutting-edge technology

Vertex100 is a testament to innovation

The **Vertex100**'s sophisticated ethernet TCP/IP interface is designed for effortless connectivity, enabling direct integration into corporate Ethernet LANs as well as compatibility with various facility monitoring systems, thereby facilitating a versatile and connected environment.

Features

- Channel sizes: 100nm, 200nm, 300nm, 500nm
- Two or Four channels of simultaneous count data
- 100 mL per minute flow rate
- Built-in 3.5" color touch screen display
- Leak detection sensor
- 316L stainless steel construction
- Ethernet, RS485 Modbus Serial, 4-20mA
- NEMA style enclosure
- Integrated manual flow control
- 2 Year Warranty



golighthouse.com

info@golighthouse.com




LIGHTHOUSE
WORLDWIDE SOLUTIONS

(Toll-free) 1 800 945 5905

(International) +1 541 770 5905

Vertex100

Liquid Particle Counter

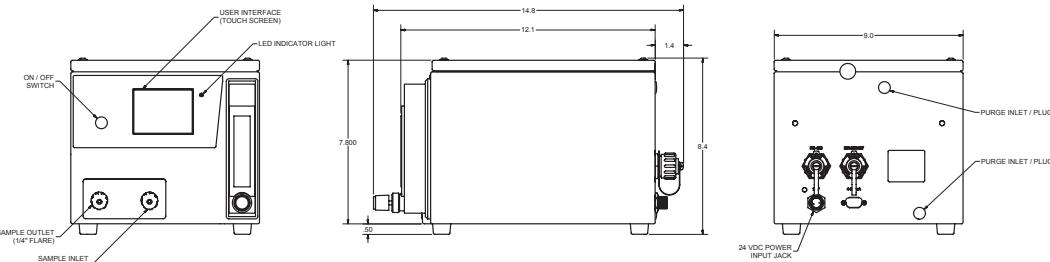

Vertex100

Features

| | |
|------------------------------------|---|
| Size Range | 100 - 500 nm |
| Channels | 2 or 4 |
| Standard Channel Sizes | 100 nm, 200 nm, 300 nm, 500 nm |
| Flow Rate | 100 mL/min |
| Sample Volume | 5.0 mL/min |
| Zero Count Level | ≤ 20 count/L |
| Laser Source | Solid state laser |
| Calibration | NIST traceable |
| Communication Modes | Ethernet, Serial RS-485, 4-20mA |
| Data Storage Records | 3,000 Records with a Rolling Buffer |
| Display | TFT color touch screen |
| Concentration Limit | >100,000 counts/mL @ 10% coincidence loss |
| Enclosure | 316L stainless steel |
| Sample Inlet/Outlet Connection | 1/4" Flaretek™ |
| Environmental Conditions Operating | 50°F to 104°F (10°C to 40°C), 20% to 95% non-condensing |
| Environmental Conditions Storage | 14°F to 122°F (-10°C to 50°C), up to 98% non-condensing |
| Sample Temperature | 50°F to 122°F (10°C to 50°C) |
| Sample Pressure | 7 PSI to 100 PSI (0.5 Bar to 6.9 Bar) |
| Wetted Surface Materials | Borosilicate glass, Kalrez, PFA, PTFE, PCTFE (Kel-F), quartz, and SS316 |
| Communication Protocol | MODBUS TCP, MODBUS Serial, 4-20mA |
| Power | External Supply: Rated input 120-240V AC 50/60Hz, 0.7A - 1.4A. Rated Output: 24V DC, 5A |
| Dimensions | 9.0"(w) x 13.4"(d) x 8.4"(h) [22.9 x 34.0 x 21.3 cm] |
| Weight | 12.5 lbs (5.67 kg) |

Includes: 24V power adapter, power cord (US/UK/EU/CN), 1.8m USB-RS485 serial cable with industrial connector, 25' Ethernet cable with industrial connector, USB flash drive with Operators Manual, 2 x 10 foot sample inlet and outlet tubes (with flared tips and lock nuts), flow cell cleaning kit, calibration certificate and carrying case.

Optional: Printed operating manual; additional tubing, additional serial or Ethernet cables with industrial connector, flow cell cleaning kit.

Distributed by:



Scan to Learn More